
LANDMARK 10 SLATE



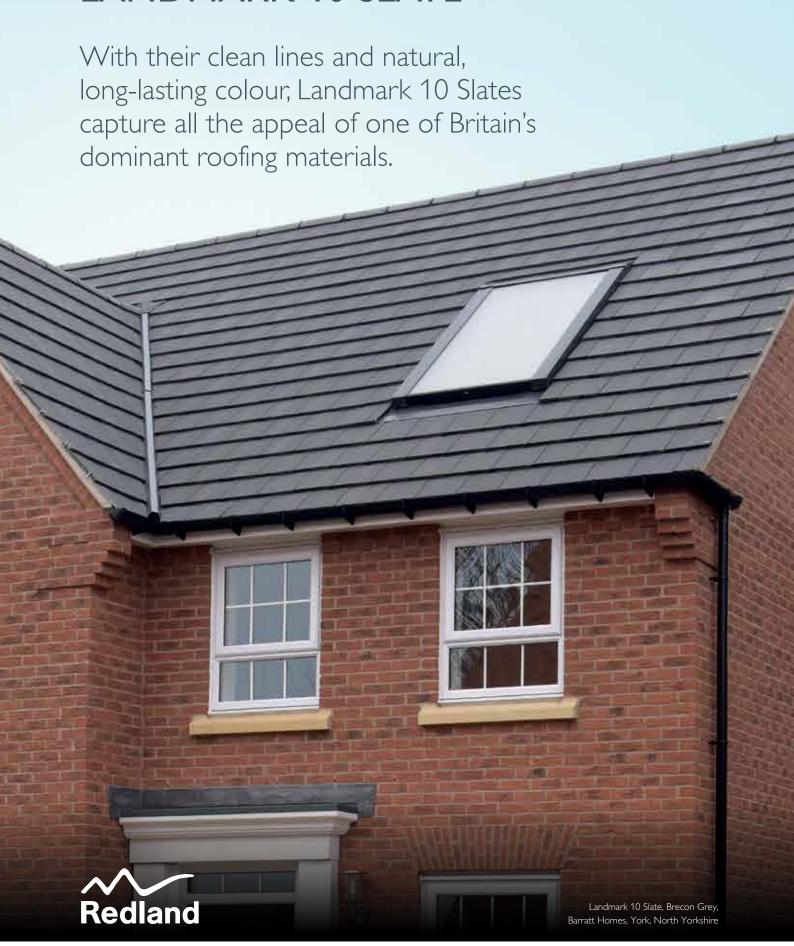

330mm 418mm

LANDMARK 10 SLATE

Each tile incorporates subtle colour differences to replicate the variations typical of natural slate while offering low minimum pitch for maximum flexibility and performance.

KEY ADVANTAGES

- Redland ColourFusion™ process ensures tiles keep their colour over long periods
- Thin leading edge, low profile tile with hidden interlock

TECHNICAL DATA

Size (overall)	418 × 330mm
•	5° at 100mm headlap / 22.5° at 75mm headlap r length of 10 metres. For rafter lengths greater than this, 03708 702595)
Maximum Pitch (subject to fixing specification	n) 90°
Minimum Headlap	75mm
Maximum Headlap	125mm
Minimum Gauge/Batten Spacing	293mm
Maximum Gauge/Batten Spacing	below 22.5° 318mm / 22.5° and over 343mm
Hanging Length (approx.)	395mm
Cover (all figures are net and do not allow for vilnear cover of 1 slate Covering capacity 10.5 slates/m² a	_{vastage)} 300mm t 318mm gauge / 9.7 slates/m² at 343mm gauge
Weight 49kg/	m²at 318mm gauge / 46kg/m²at 343mm gauge
per pallet, including pallet (approx.) per 1000	1.00 tonnes 4.7 tonnes
Battens Required (at max. gauge)	2.92mm ²
Batten Size Rafter centres up to 450mm Rafter centres up to 600mm	38 × 25mm 50 × 25mm
Fixing Clips	Eaves, Verge & Slate Clips
Nail Size for Slates#	45 × 3mm (A/A) 45 × 3.35mm (S/S)
Pallet Quantities Slates per pa	llet 210 / Slates per pack 35 / Packs per pallet 6

 $^{^{\#}(}S/S)$ Stainless Steel Annular ring shanked $\,$ (A/A) Aluminium Alloy

FITTINGS & ACCESSORIES

Verge	Dry Verge
Hip	Universal Angle Hip Dry Hip System Continuous Hip System
Valley	125 GRP Valley Dry Valley
Ridge	Universal Angle Ridge Universal Angle Monoridge
Ventilation Systems	RedVent EavesVent RedVent 25 Over-Fascia Vent Rapid Eaves Vent Top Edge Abutment Ventilation DryVent Ridge Continuous Ridge System Uni-Vent Rapid Ridge/Hip DryVent Monoridge RedLine Vent Tile 8.8k ThruVent Tile

COLOURS



47 Brecon Grey
(ColourFusion™)